

**TOOL KITS INCLUDE:**

- Reaction arm and retaining rings
- User manual
- Calibration certificate
- Weatherproof storage case
- QR code for safety instructions
- Two 18V/5.2 Ah batteries with fast charger (For the B-RAD 4000 & 7000: 1 x 5.5 Ah and 1 x 8.0 Ah)
- Swivelling tool handle & hanger (For the B-RAD 4000 & 7000 only)

Highlighted feature: SIMPLE & PRECISE TORQUE SELECTION

Simple + precise torque selection with two simple buttons to increase or decrease the torque value by 10, 100 or 1.000 Nm. The set torque value is clearly visible on the four-digit display.



More info on page 40




B-RAD SELECT
video



Feature comparison
Page 40



Accessories
Page 42



Safety solutions
Page 62

B-RAD SELECT



FEATURES:

- Brushless motor
- Digital torque settings
- Available in single and automatic 2-speed gearbox
- Controlled bolting – repeatability of +/- 3%
- Extremely low noise level –only 65 dB
- Automatic reaction arm release
- Possibility to set torque in 1-50 levels instead of torque settings
- Equal torque in tightening and loosening
- Lithium-ion 18V battery technology

WHERE USED

- Tower cranes
- Steel construction
- Civil engineering



Accessories on page 42




Torque range: 50 – 7.000 Nm

B-RAD SELECT series torque wrenches offer high torque output and reliability combined with uncompromised cordless freedom.

Cordless torque!

The **B-RAD SELECT** is especially suitable for installation and service jobs where electricity or compressed air are not available. Besides this, the **B-RAD SELECT** is also an ideal tool for valve actuation, load strapping and for driving spindles. The number of cycles per battery depends on stud length, lubrication and temperature.



Toolkit	Tool	Drive size	Torque (Nm)		Speed	Weight	Dimensions (mm)			
Number	Model	Inches	Min	Max	RPM	Kg	L	D	W	H
30213	B-RAD SELECT 275	½"	50	270	47,0	3,2	228	63	67	262
29594	B-RAD SELECT 275	¾"	50	270	47,0	3,2	228	63	67	262
28264	B-RAD SELECT 700	¾"	170	700	21,5	3,5	231	63	67	262
28266	B-RAD SELECT 1400	¾"	270	1.400	10,5	3,5	231	63	67	262
28267	B-RAD SELECT 1400-2	¾"	540	1.400	71,0	4,3	279	63	67	262
28268	B-RAD SELECT 2000	1"	400	2.000	6,0	4,0	244	69	69	262
28269	B-RAD SELECT 2000-2	1"	400	2.000	19,5	4,9	298	69	69	262
28270	B-RAD SELECT 4000	1"	800	4.000	3,0	6,0	285	81	81	266
28271	B-RAD SELECT 4000-2	1"	800	4.000	19,0	6,7	337	81	81	266
28272	B-RAD SELECT 7000	1½"	1.400	7.000	2,1	8,8	295	95	95	272

Repeatability of 3%



TOOL KITS INCLUDE:

- Reaction arm and retaining rings
- User manual
- Calibration certificate
- Weatherproof storage case
- QR code for safety instructions
- Two 18V / 5.2 Ah batteries with fast charger (For the B-RAD OFFSET 4000 & 7000: 1x 5.5 Ah and 1x 8.0 Ah)
- Swivelling tool handle & hanger (For the B-RAD 4000 & 7000 only)

Highlighted feature: Accessibility

The B-RAD OFFSET offers all the features that make RAD battery tools so popular. With one major difference: the torque multiplier is placed in an offset position, so that the wrench can be used to tighten bolts in tight and difficult to reach spaces.




B-RAD OFFSET
video



Feature comparison
Page 40



Accessories
Page 42



Safety solutions
Page 62

B-RAD OFFSET



FEATURES:

- Brushless motor
- Digital torque settings
- Controlled bolting – repeatability of +/- 3%
- Extremely low noise level – only 65 dB
- Automatic reaction arm release
- Possibility to set torque in 1-50 levels instead of torque settings
- Equal torque in tightening and loosening
- Lithium-ion 18V battery technology

WHERE USED

- Tower cranes
- Steel construction
- Civil engineering




Torque range: 50 – 7.000 Nm

The **B-RAD OFFSET** is based on the standard **B-RAD SELECT** series and has all the same features that have made these torque wrenches so popular. There is one main difference: the torque multiplier is placed out of line with the motor with an offset link, and as a result, it reduces the total tool length above the bolt with 105 mm.

This provides operators with a more versatile tool as it enables them to use the wrench in places where bolts cannot be tightened with standard wrenches. The **B-RAD OFFSET** is calibrated including the offset link, so no conversion tables are needed, unlike conventional “add-on” offset links.

In addition, it is worth knowing that the offset link can be retrofitted on any standard **B-RAD SELECT** model.

Accessories on page 42



Toolkit	Tool	Drive size	Torque (Nm)		Speed	Weight	Dimensions (mm)			
Number	Model	Inches	Min	Max	RPM	Kg	L	D	W	H
201024	B-RAD OFFSET 275	½"	50	270	48,0	3,6	151	63	83	345
201025	B-RAD OFFSET 275	¾"	50	270	48,0	3,6	151	63	83	345
201026	B-RAD OFFSET 700	¾"	170	700	21,5	3,9	155	63	83	345
201027	B-RAD OFFSET 1400	¾"	270	1.400	10,5	3,9	165	63	83	345
201029	B-RAD OFFSET 2000	1"	400	2.000	6,0	4,4	172	69	83	348
201031	B-RAD OFFSET 4000	1"	800	4.000	3,0	6,4	208	81	83	354
201033	B-RAD OFFSET 7000	1½"	1.400	7.000	2,1	9,2	230	95	95	362

**TOOL KITS INCLUDE:**

- Reaction arm and retaining rings
- Two 18V / 5.2 Ah batteries with fast charger
- User manual
- Calibration certificate
- Weatherproof storage case
- QR code for Safety instructions

Highlighted feature: ERGONOMICS

Simple + precise torque selection with two simple buttons to increase or decrease the torque value by 10, 100 or 1.000 Nm. The set torque value is clearly visible on the four-digit display. The extended positioning of the torque multiplier and the tool handle enable using these tools at floor height while standing




B-RAD EXT-R
video



Feature comparison
Page 40



Accessories
Page 42



Safety solutions
Page 62

B-RAD EXT-R

RTT EXCLUSIVE



FEATURES:

- Brushless motor
- Digital torque settings
- Available in single and automatic 2-speed gearbox
- Controlled bolting – repeatability of +/- 3%
- Extremely low noise level –only 65 dB
- Automatic reaction arm release
- Possibility to set torque in 1-50 levels instead of torque settings
- Equal torque in tightening and loosening
- Lithium-ion 18V battery technology

WHERE USED

- Rail construction
- Steel construction
- Civil engineering



Torque range: 170 – 1.400 Nm

Another addition to the standard **B-RAD SELECT** range is the extended reach version: **EXT-R**. The **EXT-R** is the ideal wrench for working effortlessly in a standing position or for jobs above your head.


Having difficulties tightening a deeply recessed bolt? With the **B-RAD EXT-R** you can likely reach it!

The **EXT-R** has especially been designed to increase ergonomics. With its very low weight and with an extra adjustable handle, you can assume the perfect working position. No more back aches, tired arms or working on your knees. Due to the large distance to the reaction arm, pinching risks are practically eliminated and therefore the **EXT-R** is extremely safe.

The **B-RAD EXT-R** series offers the same features as the standard **B-RAD SELECT** and the robust extension can be ordered separately as well, making it possible to retrofit it on a standard **B-RAD Select**.

Given the applications, the **EXT-R** is only available for the 700 Nm and 1400 (-2) Nm multipliers.

Accessories on page 42

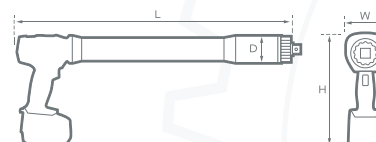

Toolkit	Tool	Drive size	Torque (Nm)		Speed	Weight	Dimensions (mm)			
Number	Model	Inches	Min	Max	RPM	Kg	L	D	W	H
201000	B-RAD EXT-R 700	3/4"	170	700	21,5	5,9	800	63	67	262
201003	B-RAD EXT-R 1400	3/4"	270	1.400	10,5	5,9	810	63	67	262
201004	B-RAD EXT-R 1400-2	3/4"	540	1.400	71,0	6,5	860	63	67	266

Repeatability of 3%